

## Direct Fill for Carbon Canister Systems EPA Certified

- Essential component of VaporTec and SecureStop
- Single 1 psi overpressure relief safety valve built into cap
- Anti-backout feature prevents accidental removal
- Automatic nozzle shutoff 4-10 gpm
- Reduced number of components in the system
- Includes ratcheting tethered cap
- Compatible with Attwood's carbon canister architecture
- Meets CARB 13 CCR 2235 and ISO 13331 nozzle mating and retention standards
- Compatible with Ethanol blended fuels
- Fits 1-1/2" fill hose


Description	OEM Part #	Part #
Carbon Canister Direct Fill	99TDF100-1	—



## 90° P-Trap Fuel Tank Vents

These vents help prevent water from entering the fuel tank, yet allow air to vent freely, during normal sea conditions and washdowns. This eliminates the need for an anti-siphon loop in the vent hose. For 5/8" I.D. hose. Meets ABYC standard.

The arrows in this cross-section show the baffled route that water would have to travel in order to reach the fuel vent hose. Compatible with Ethanol blended fuels.

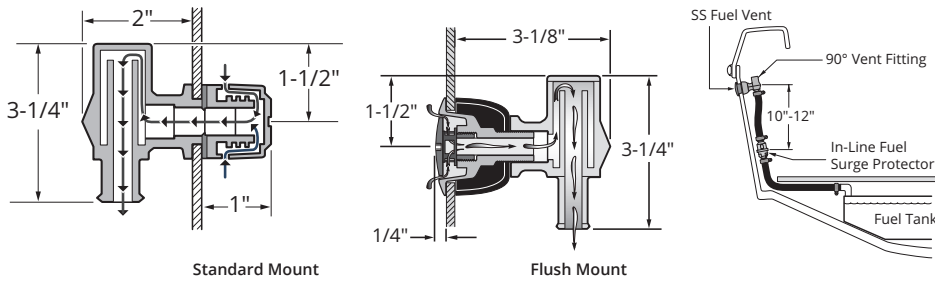

1670



1674

Description	Maximum Hull Thickness	Installation Hole Size	Style	OEM Part #	Part #
Standard Mount - 5/8" I.D. Hose	9/16"	3/4"	Black with black vent head	1670-1	1670-3
			Black with stainless steel trim cover	66419-1	66419-3
Replacement covers for Standard Mount	—	—	For 1670	911526-1	—
			For 66419	911528-1	—
Flush Mount - 5/8" I.D. Hose	1"	1-3/8"	Black with stainless steel vent head	1674-1	1674-6
Replacement Spacer for Flush Mount	1/4" - 1/2"	—	For 1674	911507-1	—
	1/2" - 3/4"	—	For 1674	911508-1	—