






BISECTED	STRAIGHT
ROPE ENTRY	ROPE ENTRY

COL E EITHE	
Rope	Max Rope
Deflection	Tension
Angle (°)	(kg)
10	2290
15	1530
30	770
45	520
60	400
90	280









 \triangle

VARNING.


IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

=	ALL DIN	MENSIONS	IN MM	FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT
3	SCALE	PAGE SIZE	DATE					
	1:2	A4	APR 2018	M5 CSK x 4	10mm	67g	400kg	800kg


T25-2
FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK







BISECTED	STRAIGHT
DIOLOTED	DODE ENTRY
ROPE ENTRY	ROPE ENTRY

COL E LIVITA	
Rope	Max Rope
Deflection	Tension
Angle (°)	(kg)
10	2290
15	1530
30	770
45	520
60	400
90	280











NARNING.


IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.




COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS
FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

=	ALL DIN	MENSIONS	IN MM	FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT
3	SCALE	PAGE SIZE	DATE					
	1:2	A4	APR 2018	M5 CSK x 3	10mm	52g	400kg	600kg


T25-2Y
FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK







	BISECTED	STRAIGHT
ROPE ENTRY ROPE ENTRY		ROPE ENTRY

/lax Rope
Tension
(kg)
2290
1530
770
520
400
280





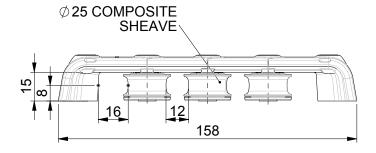





VARNING


IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

F	ALL DIN	MENSIONS	IN MM	FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT	
S	SCALE	PAGE SIZE	DATE	ME COL					
	1:2	A4	APR 2018	M5 CSK x 5	10mm	86g	400kg	1000kg	


T25-3
FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK







BISECTED	STRAIGHT
	ROPE ENTRY
ROPE ENTRY	NOFE LIVINI

рe
on
g)
90
30
70
20
00
30









IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT: THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

ALL DIMENSIONS IN MM SCALE PAGE SIZE

DATE

APR M5 CSK 2018 x 4

FASTENERS

10mm

MAX LINE SIZE


WEIGHT

78g

400kg 800kg

SWL PER SHEAVE SWL PER UNIT


FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK







ROPE ENTRY	BISECTED	STRAIGHT
ROPE ENTRY NOT LENTRY	ROPE ENTRY	ROPE ENTRY

Max Rope
Tension
(kg)
2290
1530
770
520
400
280

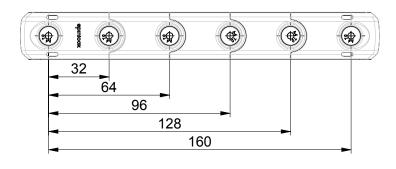



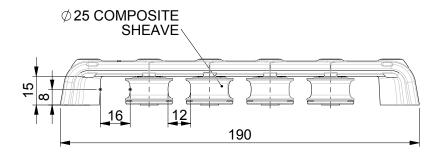





VARNING.


IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

F	ALL DIN	MENSIONS	IN MM	FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT
<u>S</u>		PAGE SIZE	DATE	ME CSK				
	1:2	A4	2018	M5 CSK x 6	10mm	106g	400kg	1200kg


T25-4
FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK







BISECTED	STRAIGHT
	ROPE ENTRY
ROPE ENTRY	NOI E ENTIN

Max Rope
Tension
(kg)
2290
1530
770
520
400
280





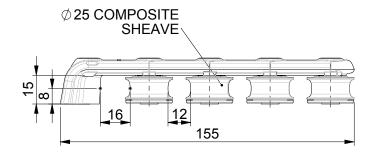





VARNING.


IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS
FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

_	ALL DIN	MENSIONS	IN MM	FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT
<u>s</u>		PAGE SIZE	DATE					
	1:2	A4	APR 2018	M5 CSK x 5	10mm	91g	400kg	1000kg


T25-4Y
FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK







BISECTED	STRAIGHT
BIOLOTED	ROPE ENTRY
ROPE ENTRY	ROPE ENTRI

OI L LIVII (I	
Rope	Max Rope
Deflection	Tension
Angle (°)	(kg)
10	2290
15	1530
30	770
45	520
60	400
90	280

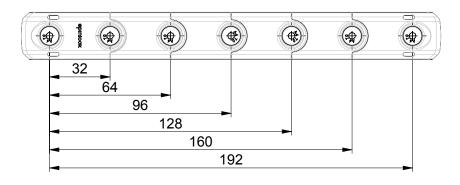



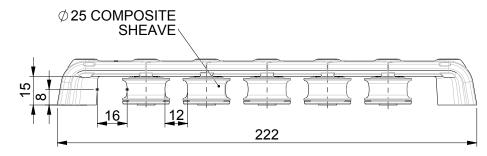





VARNING.


IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

F	ALL DIN	MENSIONS	IN MM	FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT	
S		PAGE SIZE	DATE	M5 CSK					
	1:2	A4	2018	M5 CSK x 7	10mm	126g	400kg	1400kg	


T25-5







	BISECTED	STRAIGHT
ROPE ENTRY ROPE ENTRY		ROPE ENTRY

Rope
nsion
(kg)
2290
1530
770
520
400
280

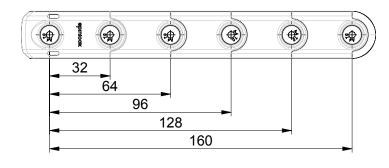



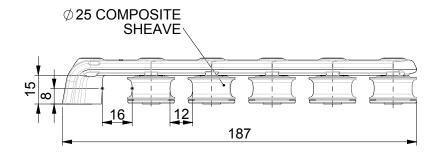





VARNING.


IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT:
THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS
FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

_	ALL DIN	MENSIONS	IN MM	FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT
<u>s</u>		PAGE SIZE	DATE					
	1:2	A4	APR 2018	M5 CSK x 6	10mm	111g	400kg	1200kg


T25-5Y
FOR MORE INFO CONTACT
SPT@SPINLOCK.CO.UK






BISECTED	STRAIGHT
ROPE ENTRY	ROPE ENTRY

OI L LIVIIVI				
Rope	Max Rope Tension (kg)			
Deflection				
Angle (°)				
10	2290			
15	1530			
30	770			
45	520			
60	400			
90	280			

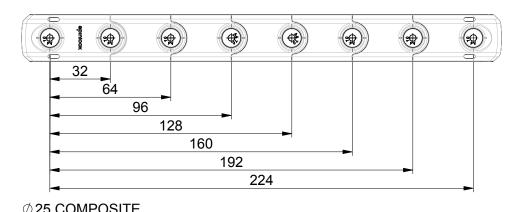

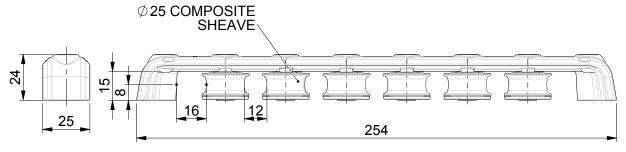





VARNING:


IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND ALWAYS CHECK DIMENSIONS BEFORE DRILLING.



THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

RF -	ALL DIMENSIONS IN MM			FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT
YS	SCALE	PAGE SIZE	DATE					
	1:2	A4	APR 2018	M5 CSK x 8	10mm	160g	400kg	1600kg


T25/6
FOR MORE INFO CONTACT
SPT@SPINLOCK.CO.UK







BISECTED	STRAIGHT
DISECTED	ROPE ENTRY
ROPE ENTRY	ROPE ENTRY

OI L LIVII (I			
Rope	Max Rope Tension (kg)		
Deflection			
Angle (°)			
10	2290		
15	1530		
30	770		
45	520		
60	400		
90	280		

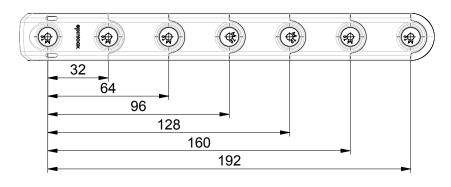



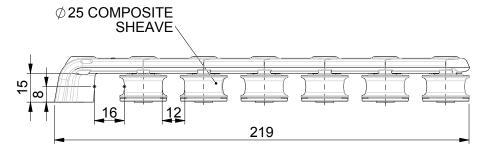





IF USING AS A DRILL TEMPLATE, ENSURE PRINTER SETTINGS ARE ADJUSTED TO ACCOUNT FOR THE DRAWING SCALE AND **ALWAYS** CHECK DIMENSIONS BEFORE DRILLING.



COPYRIGHT: THIS DRAWING IS PROTECTED BY COPYRIGHT. ANY USE IS FORBIDDEN WITHOUT THE WRITTEN CONSENT OF SPINLOCK.

RF	ALL DIMENSIONS IN MM			FASTENERS	MAX LINE SIZE	WEIGHT	SWL PER SHEAVE	SWL PER UNIT	
YS	SCALE 1.2	PAGE SIZE	APR	M5 CSK x 7	10mm	143g	400kg	1400kg	
	1.4	\neg	2018	X /		•		•	

FOR MORE INFO CONTACT SPT@SPINLOCK.CO.UK